

normet Normet Corporation Ahmolan tie 6 FI-74510 IISALMI, FINLAND Tel +358 (0) 17 83 241 Fax +358 (0) 17 823 606	Himec 9905 BT	TI 1700625
	Twin boom platform lifter	DRW DATE 09.12.2003 PAGE 3 / 3 APPR. 06.06.2007

HIMEC 9905 BT

is a self propelled twin boom unit suitable for lifting and installing works and charging of explosives in tunnels.

DIMENSIONS

Length	9640 mm
Width	2040/3800 mm
Height	2900 mm
Wheel base	3350 mm
Ground clearance	360 mm
Outer turning radius	7500 mm
Inner turning radius	3600 mm
Weight, max. total	19600 kg

1. NORMET TWINBOOM

Twinboom is suitable for charging, bolting and installing works. Boom controls are in the basket and down on the carrier. Each boom can be operated independently allowing several holes to be charged safely at the same time. Large coverage allows the whole face to be charged from one setup.

Boom lift	- 20° ... + 60°
Boom slew	-8°/+40°
Max. platform height	9,5 m
Vertical working reach	11,7 m
Lateral working reach	16 m
Lifting capacity	500 kg

2. SUPPORT LEGS

One pair in front and one pair at rear, hydraulically operated, front pair with lateral extensions.

3. WORKING LIGHTS

On baskets	4 x 70 W
On carrier	4 x 70 W

4. SAFETY CANOPY

over the drivers seat fulfills the European safety regulations.

5. CARRIER NC 98

is specially designed for underground use. Diesel engine with hydro-dynamic transmission and 4-wheel drive gives max. speed of 25 km/h. Fully enclosed multidisc 2-circuit brakes and parking and emergency brake make operating reliable and safe in the harsh underground conditions.

Diesel engine	96 kW
Max. speed	25 km/h

OPTIONS AND ACCESSORIES:

- * fully enclosed driver's cab
- * Docking kit
- * electrically or hydraulically driven compressor
- * PPE 150 V - electrically driven hydraulic power pack
- * HGEN60 - hydraulically operated generating set
- * Manually or hydraulically driven cable reel with cable
- * Screen kit - kit for net installing
- * HHPW- hydraulic driven high pressure washing kit
- * Safety canopy to basket
- * ANFO Charging equipment on docking kit
 - Vessel sizes
 - * 2x 500 l
 - * 2 x 720 l
 - * 2 x 1000 l
- * Compressor 5 cm/min
- * PPE 550 V
 - * electrically driven hydraulic power pack for compressor and boom operation



normet

Normet Corporation
Ahmolan tie 6
FI-74510 IISALMI, FINLAND
Tel +358 (0) 17 83 241
Fax +358 (0) 17 823 606

Himec 9905 BT

Twin boom platform lifter

Tl 1700625
DRW
DATE 09.12.2003
PAGE 2 / 3
APPR. 06.06.2007

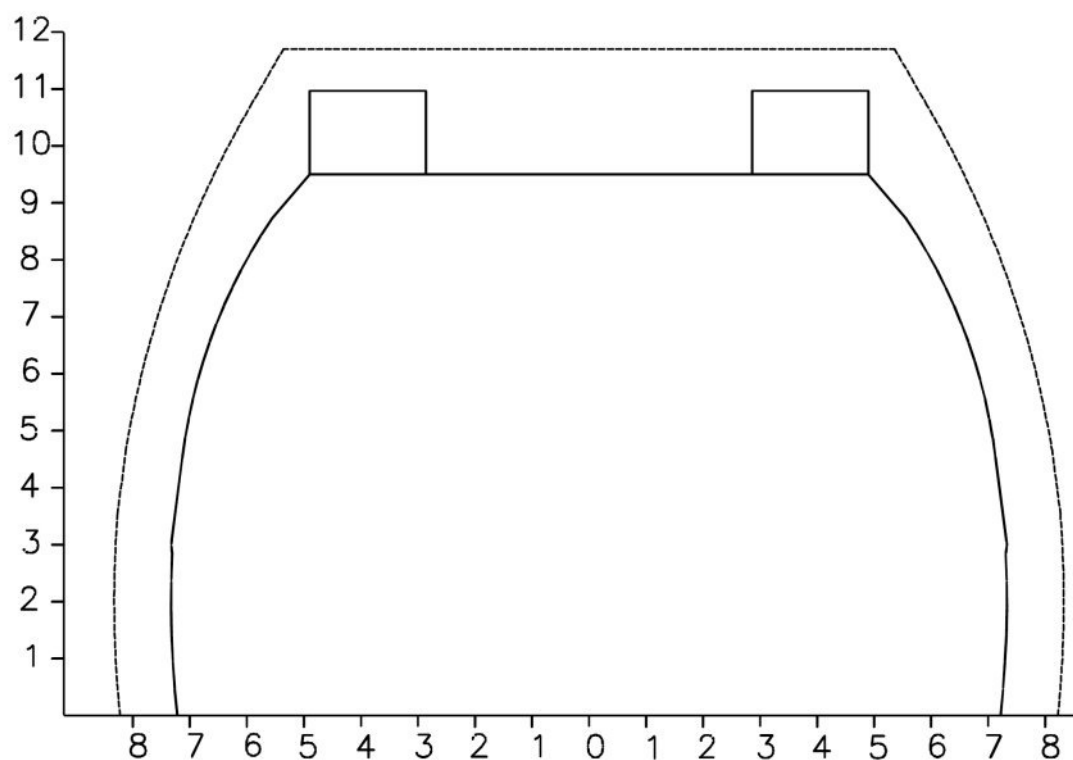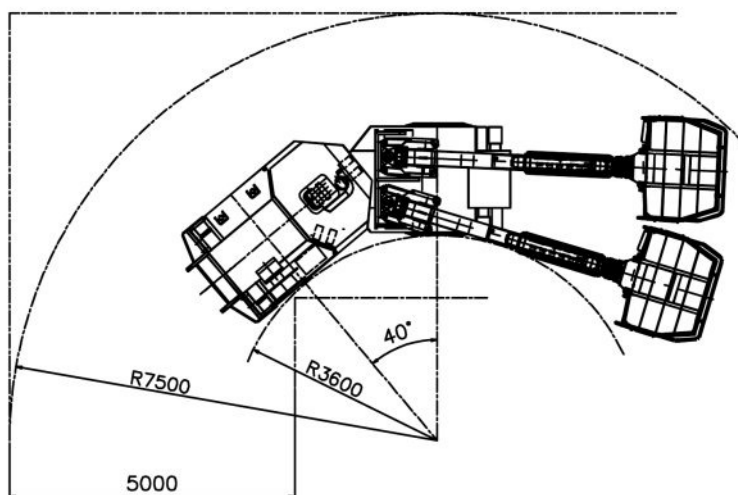

normet**Normet Corporation**

Ahmolan tie 6

FI-74510 IISALMI, FINLAND

Tel +358 (0) 17 83 241

Fax +358 (0) 17 823 606

Himec 9905 BT

Twin boom platform lifter

TI	1700625
DRW	
DATE	09.12.2003
PAGE	1 / 3
APPR.	06.06.2007

